

# GAS HEATER HHB SERIES



Leehove 2 | 2678 MC De Lier | The Netherlands  
T (+31) 174 - 516741 | F (+31) 174 - 518021  
info@hollandheater.nl


[WWW.HOLLANDHEATER.NL](http://WWW.HOLLANDHEATER.NL)



W O R L D W I D E



W O R L D W I D E

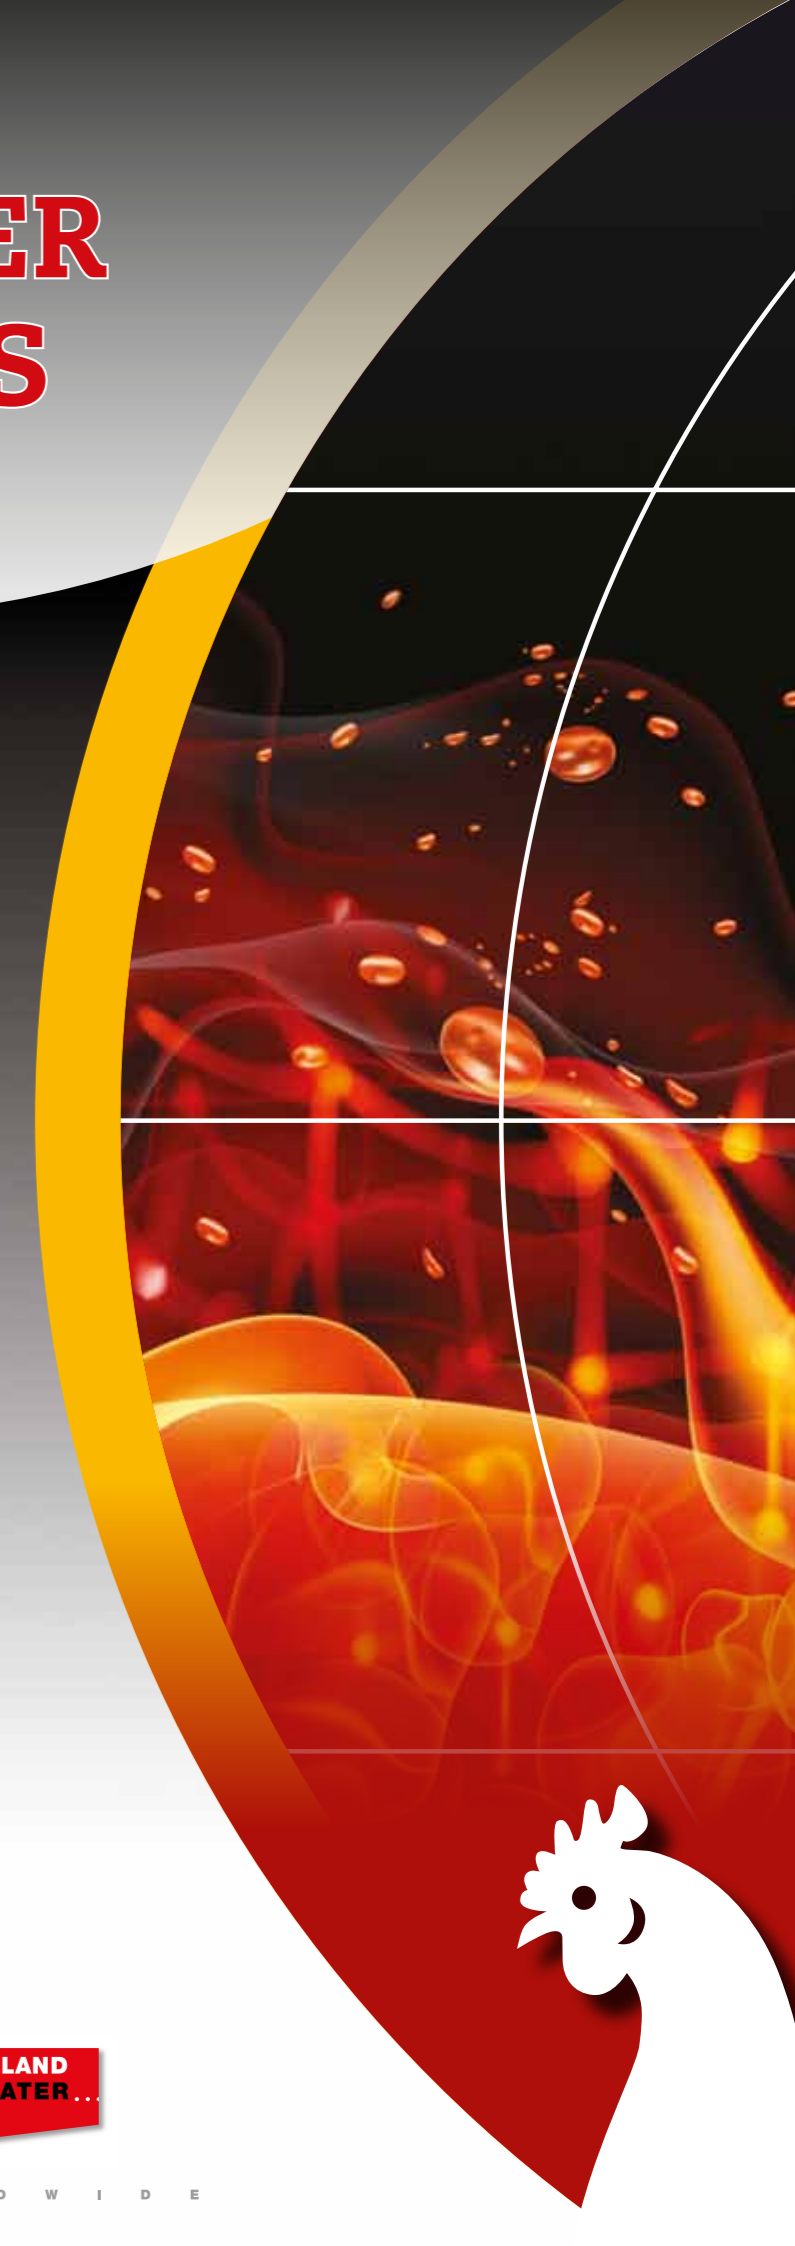

# HHB SERIES - Long lifetime and efficient gas heaters

The HHB gas/propane direct fired heater is an innovative and effective solution designed to heat livestock buildings. More than 40 years of experience and knowledge have resulted in designing a durable and highly efficient air heater. We know that it is really important to you as a Producer that heaters perform well, and are available at a competitive price.

## Product benefits

- 100% efficient - hot air is blown into a livestock building.
- Optimized airflow with a maximum length of 40 meters, due to proper position of the fan.
- Diverse safeguards ensuring full safety operation:
  - Air flow switch controls operation of fan
  - Ionization probe controls safe combustion
  - Maximum thermostat prevents against overheating of the housing



- Very easy internal cleaning due to easy-open inspection cover.
- Heater ( IP65 ) resists thorough intensive cleaning with compressed air or pressure washer.
- High quality materials guarantee longevity, despite intensive cleaning.
- Heater provides components of well known brands which are easy to get locally and to change.
- Clear LED lighting as fault and status indication of the heater.
- Very quiet due to optimised design of the heater.
- Control possible by means of a climate control computer.



W O R L D W I D E

## Technical specification

TYPE: HHB Series		40	70	100	120
Rated load	kW	40	70	100	120
	Btu	136.136	238.910	341.300	409.560
Air movement	m <sup>3</sup> /h	3800	5000	6500	6500
Electric consumption	Amp.	1,3	1,8	2,75	2,75
Gasconsumption Propane	kg/h	2,9	5,4	6,5	8,1
Gasconsumption Natural Gas	m <sup>3</sup> /h	4,3	7,5	10,8	13,0
Frequency	Hz	50/60	50/60	50/60	50/60
Engine power	Watt	265	375	620	620
Voltage	Volt	230	230	230	230
Revolution speed	T. p/min.	1330	1400	1400	1400
Air throw	mtr	35	35	40	40
Weight	kg	32	39	48	48
Length	mm	1036	1105	1152	1152
Width	mm	582	637	689	689
Height	mm	509	580	624	624

*No rights can be derived from this technical specifications.*

## Accessoires

Valve natural gas



Hose natural gas



Gas filter



Pressure regulator

